

Public-law institution jointly founded by the federal states and the Federation

European Technical Assessment Body
for construction products



European Technical Assessment

ETA-24/0545
of 17 June 2024

English translation prepared by DIBt - Original version in German language

General Part

Technical Assessment Body issuing the European Technical Assessment:

Deutsches Institut für Bautechnik

Trade name of the construction product

G&B Fissaggi concrete screw GETO PLUS TMK CE1

Product family to which the construction product belongs

Fasteners for use in concrete for redundant non-structural systems

Manufacturer

G&B Fissaggi Srl
Corso Savona, 22
10029 VILLASTELLONE (TO)
ITALIEN

Manufacturing plant

PLANT C

This European Technical Assessment contains

16 pages including 3 annexes which form an integral part of this assessment

This European Technical Assessment is issued in accordance with Regulation (EU) No 305/2011, on the basis of

EAD 330747-00-0601, Edition 06/2018

The European Technical Assessment is issued by the Technical Assessment Body in its official language. Translations of this European Technical Assessment in other languages shall fully correspond to the original issued document and shall be identified as such.

Communication of this European Technical Assessment, including transmission by electronic means, shall be in full. However, partial reproduction may only be made with the written consent of the issuing Technical Assessment Body. Any partial reproduction shall be identified as such.

This European Technical Assessment may be withdrawn by the issuing Technical Assessment Body, in particular pursuant to information by the Commission in accordance with Article 25(3) of Regulation (EU) No 305/2011.

Specific Part

1 Technical description of the product

The G&B Fissaggi concrete screw GETO PLUS TMK CE1 is an anchor of size 5 and 6 mm made of galvanised steel respectively steel with zinc flake coating and of stainless steel. The anchor is screwed into a predrilled cylindrical drill hole. The special thread of the anchor cuts an internal thread into the member while setting. The anchorage is characterised by mechanical interlock in the special thread.

The product description is given in Annex A.

2 Specification of the intended use in accordance with the applicable EAD

The performances given in Section 3 are only valid if the anchor is used in compliance with the specifications and conditions given in Annex B.

The verifications and assessment methods on which this European Technical Assessment is based lead to the assumption of a working life of the anchor of at least 50 years. The indications given on the working life cannot be interpreted as a guarantee given by the producer, but are to be regarded only as a means for choosing the right products in relation to the expected economically reasonable working life of the works.

3 Performance of the product and references to the methods used for its assessment

3.1 Safety in case of fire (BWR 2)

Essential characteristic	Performance
Reaction to fire	Class A1
Resistance to fire	See Annex C3

3.2 Safety in use (BWR 4)

Essential characteristic	Performance
Characteristic resistance to tension load (static and quasi-static loading)	See Annex B2, Annex C1 and C2
Characteristic resistance to shear load (static and quasi-static loading)	See Annex C1 and C2
Durability	See Annex B1

4 Assessment and verification of constancy of performance (AVCP) system applied, with reference to its legal base

In accordance with European Assessment Document EAD No. 330747-00-0601, the applicable European legal act is: [97/161/EC].

The system to be applied is: 2+

5 Technical details necessary for the implementation of the AVCP system, as provided for in the applicable European Assessment Document

Technical details necessary for the implementation of the AVCP system are laid down in the control plan deposited at Deutsches Institut für Bautechnik.

Issued in Berlin on 17 June 2024 by Deutsches Institut für Bautechnik


Dipl.-Ing. Beatrix Wittstock
Head of Section

beglaubigt:
Tempel


Product in installed condition

G&B concrete screw GETO PLUS TMK CE1 (TMK 5 and TMK 6)


- Galvanized carbon steel
- Zinc flakes coated carbon steel

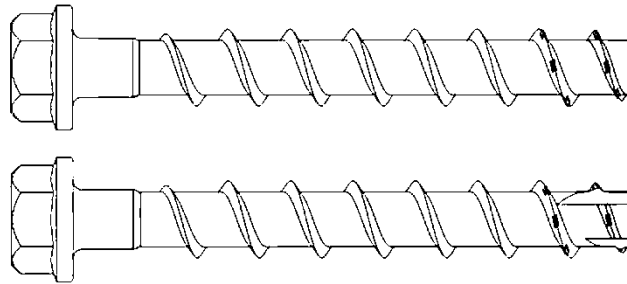

- Stainless steel A4
- High corrosion resistant steel HCR

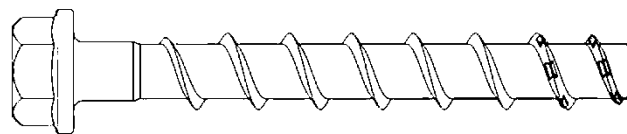

e.g. GETO PLUS TMK CE1, zinc flakes coated, with hexagon head and fixture

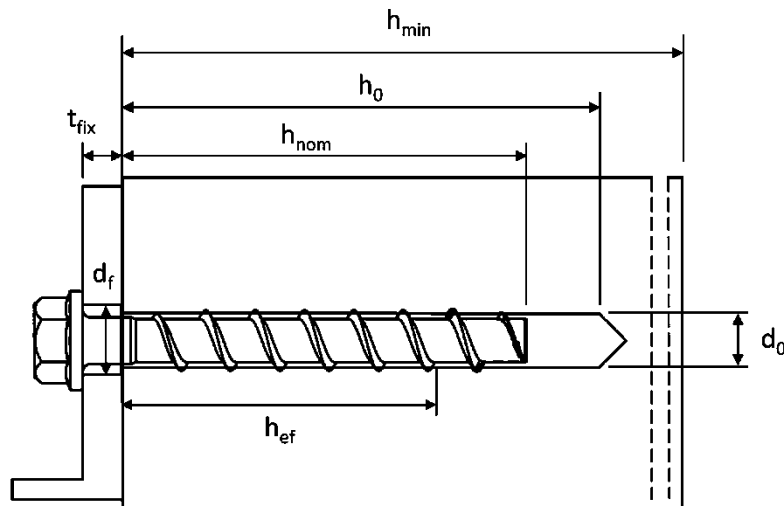

d_0 = nominal drill hole diameter
 t_{fix} = thickness of fixture
 d_f = clearance hole diameter


h_{min} = minimum thickness of member
 h_{nom} = nominal embedment depth
 h_0 = drill hole depth
 h_{ef} = effective embedment depth

G&B concrete screw GETO PLUS TMK CE1

Product description
Product in installed condition

Annex A1

Installed condition in precast prestressed hollow core slabs

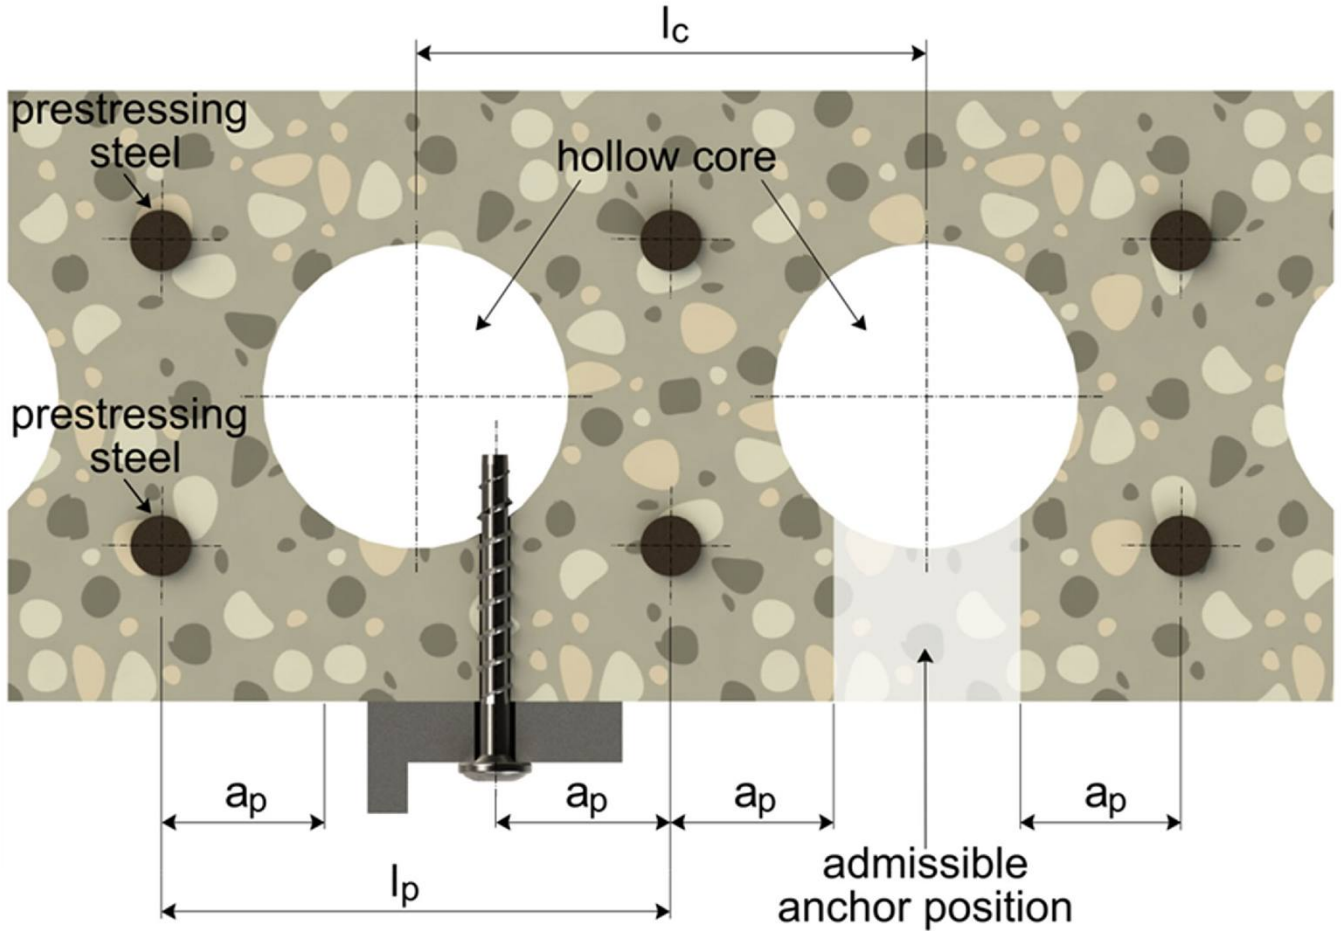

Important ratio: $\frac{w}{e} \leq 4,2$

w = core width

e = web thickness

l_c = core distance ≥ 100 mm

l_p = prestressing steel ≥ 100 mm























a_p = distance between anchor position and prestressing steel ≥ 50 mm

G&B concrete screw GETO PLUS TMK CE1

Product description

Installed condition in precast prestressed hollow core slabs

Annex A2

		1. Configuration with metric connection thread and hexagon socket e.g. TSM 8x105 M10 SW5
		2. Configuration with metric connection thread and hexagon drive e.g. TSM 8x105 M10 SW7
		3. Configuration with washer and hexagon head e.g. TSM 8x80 SW13
		4. Configuration with washer, hexagon head and TORX drive e.g. TSM 8x80 SW13 TX40
		5. Configuration with hexagon head e.g. TSM 8x80 SW13
		6. Configuration with countersunk head and TORX drive e.g. TSM 8x80 TX40
		7. Configuration with pan head and TORX drive e.g. TSM 8x80 TB TX40
		8. Configuration with large pan head and TORX drive e.g. TSM 8x80 TL TX40
		9. Configuration with countersunk head and connection thread e.g. TSM 6x55 AG M8
		10. Configuration with hexagon drive and connection thread e.g. TSM 6x55 M8 SW10
		11. Configuration with internal thread and hexagon drive e.g. TSM 6x55 IM M8/10

G&B concrete screw GETO PLUS TMK CE1

Product description
Screw types

Annex A3

English translation prepared by DIBt


Table 1: Material

Part	Product name	Material
all types	GETO PLUS TMK CE1	- Steel EN 10263-4:2017 galvanized acc. to EN ISO 4042:2018 - Zinc flake coating according to EN ISO 10683:2018 ($\geq 5\mu\text{m}$)
	GETO PLUS TMK CE1 A4	1.4401; 1.4404; 1.4571; 1.4578
	GETO PLUS TMK CE1 HCR	1.4529

Part	Product name	Nominal characteristic steel		Rupture elongation A_5 [%]
		Yield strength f_{yk} [N/mm ²]	Ultimate strength f_{uk} [N/mm ²]	
all types	GETO PLUS TMK CE1	560	700	≤ 8
	GETO PLUS TMK CE1 A4			
	GETO PLUS TMK CE1 HCR			

Table 2: Dimensions

Anchor size			TMK 5	TMK 6
Screw length	$\leq L$	[mm]	200	
Core diameter	d_k	[mm]	4,0	5,1
Thread outer diameter	d_s	[mm]	6,5	7,5

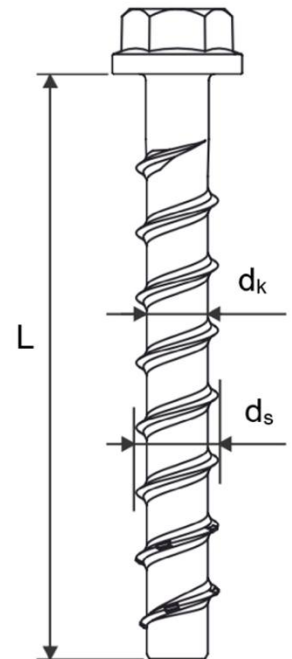

Marking:


GETO PLUS TMK CE1

Screw type: TSM
Screw size: 10
Screw length: 100



GETO PLUS TMK CE1 A4

Screw type: TSM
Screw size: 10
Screw length: 100
Material: A4




GETO PLUS TMK CE1 HCR

Screw type: TSM
Screw size: 10
Screw length: 100
Material: HCR



Marking "k" or "x"
for anchors with
connection thread
and $h_{nom} = 35\text{mm}$



G&B concrete screw GETO PLUS TMK CE1

Product description
Material, Dimensions and markings

Annex A4

Specification of Intended use

Anchorage subject to:

- static and quasi static loads
- Used only for multiple use for non-structural application according to EN 1992-4:2018
- Used for anchorages with requirements related to resistance of fire (not for using in prestressed hollow core slabs): size 5 and 6
- Used for anchorages in prestressed hollow core slabs: size 6

Base materials:

- Compacted reinforced and compacted unreinforced concrete without fibers according to EN 206:2013.
- Strength classes C20/25 to C50/60 according to EN 206:2013.
- Cracked and uncracked concrete.

Use conditions (Environmental conditions):

- Concrete screws subject to dry internal conditions: all screw types.
- For all other conditions corresponding to corrosion resistance classes CRC according to EN 1993-1-4:2006 + A1:2015
 - Stainless steel according to Annex A4, screw type GETO PLUS TMK CE1 A4 with marking A4: CRC III
 - High corrosion resistant steel according to Annex A4, type GETO PLUS TMK CE1 HCR with marking HCR: CRC V

Design:

- Anchorages are to be designed under the responsibility of an engineer experienced in anchorages and concrete work.
- Verifiable calculation notes and drawings are to be prepared taking account of the loads to be anchored. The position of the anchor is indicated on the design drawings (e.g. position of the anchor relative to reinforcement or to supports, etc.).
- Anchorages are designed according to EN 1992-4:2018 and EOTA Technical Report TR 055, Version February 2018.
- The design for shear load according to EN 1992-4:2018, Section 6.2.2 applies for all specified diameters d_f of clearance hole in the fixture in Annex B2, Table 3.

Installation:

- Hammer drilling or hollow drilling.
- Anchor installation carried out by appropriately qualified personal and under the supervision of the person responsible for technical matters on site.
- In case of aborted hole: new drilling must be drilled at a minimum distance of twice the depth of aborted hole or closer, if the aborted hole is filled with high strength mortar and only if the hole is not in the direction of the oblique tensile or shear load.
- After installation further turning of the anchor must not be possible. The head of the anchor is supported in the fixture and is not damaged.

G&B concrete screw GETO PLUS TMK CE1

**Intended use
Specification**


Annex B1

Table 3: Installation parameters

GETO PLUS TMK CE1 size			TMK 5	TMK 6	
Nominal embedment depth	h_{nom}		h_{nom1}	h_{nom1}	h_{nom2}
	[mm]		35	35	55
Nominal drill hole diameter	d_0	[mm]	5	6	
Cutting diameter of drill bit	$d_{cut} \leq$	[mm]	5,40	6,40	
Drill hole depth	$h_0 \geq$	[mm]	40	40	60
Clearance hole diameter	$d_f \leq$	[mm]	7	8	
Installation torque (version with connection thread)	$T_{inst} \leq$	[Nm]	8	10	
Recommended torque impact screw driver		[Nm]	Max. torque according to manufacturer's instructions		
			110	160	

Table 4: Minimum thickness of member, minimum edge distance and minimum spacing

GETO PLUS TMK CE1 size			TMK 5	TMK 6	
Nominal embedment depth	h_{nom1}		h_{nom1}	h_{nom1}	h_{nom2}
	[mm]		35	35	55
Minimum thickness of member	h_{min}	[mm]	80	80	100
Minimum edge distance	c_{min}	[mm]	35	35	40
Minimum spacing	s_{min}	[mm]	35	35	40

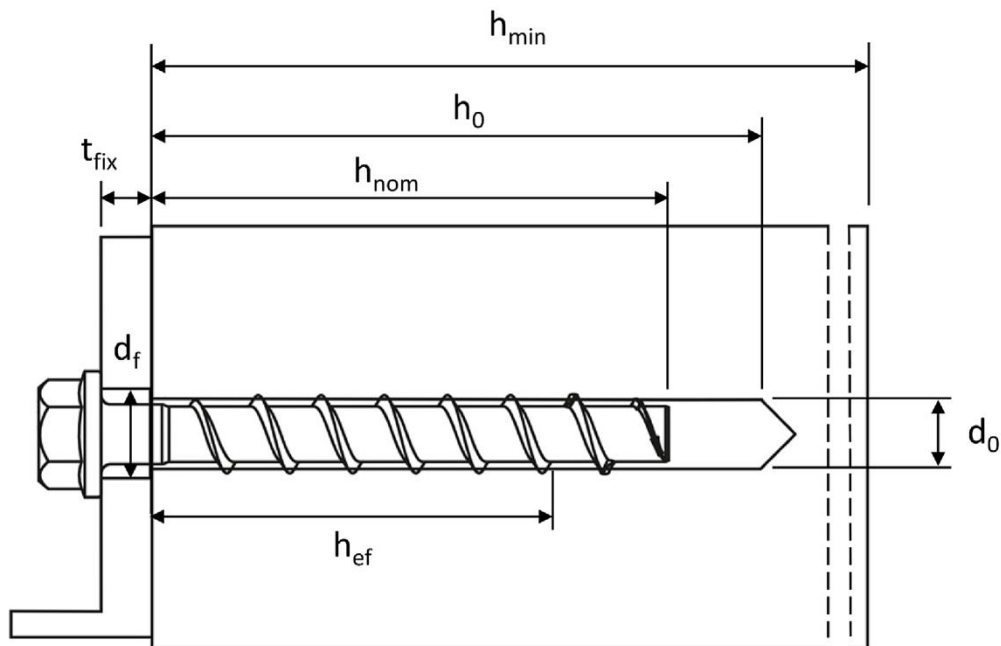


G&B concrete screw GETO PLUS TMK CE1

Intended use
Installation parameters

Annex B2

Installation parameters for anchorages in precast prestressed hollow core slabs

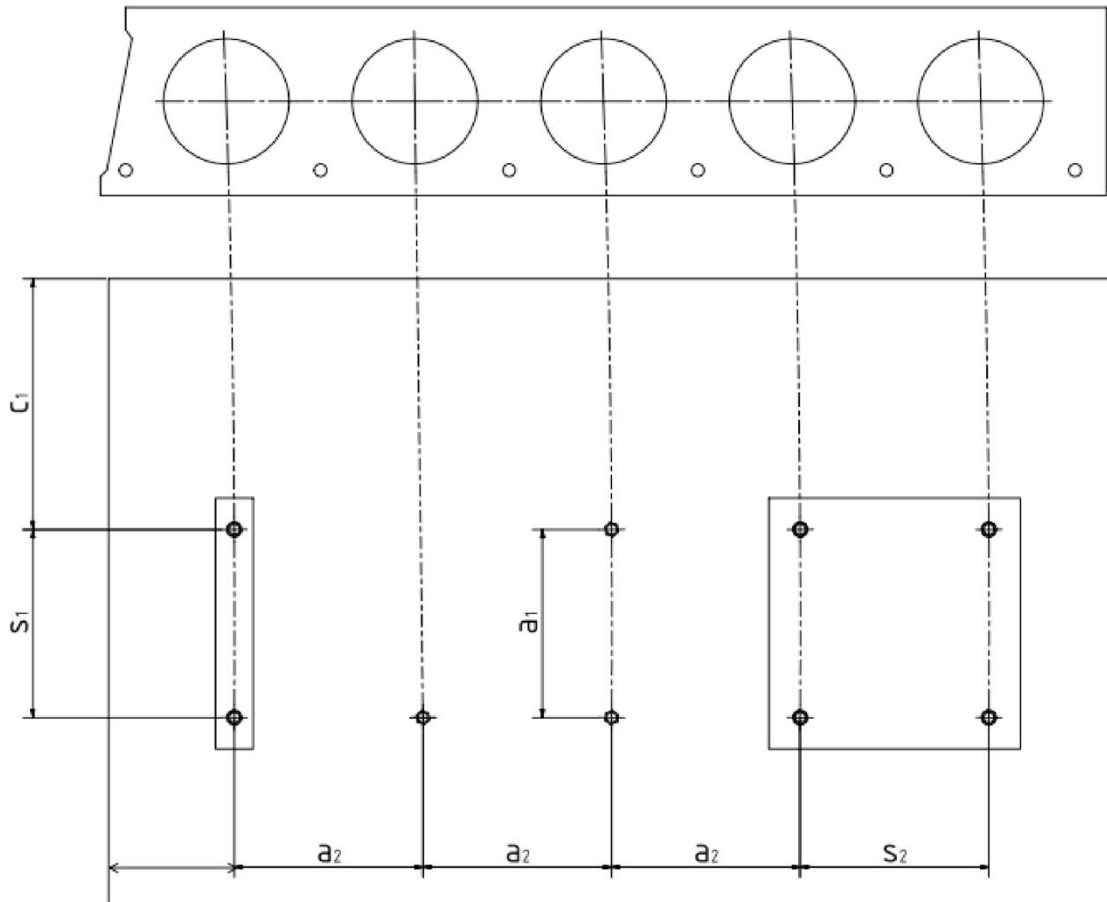

c_1, c_2 = edge distance

s_1, s_2 = anchor spacing

a_1, a_2 = distance between anchor groups

c_{min} = minimum edge distance ≥ 100 mm

s_{min} = minimum anchor spacing ≥ 100 mm

a_{min} = minimum distance between anchor groups ≥ 100 mm





G&B concrete screw GETO PLUS TMK CE1

Intended use

Installation parameters for anchorages in precast prestressed hollow slabs

Annex B3

Installation Instructions

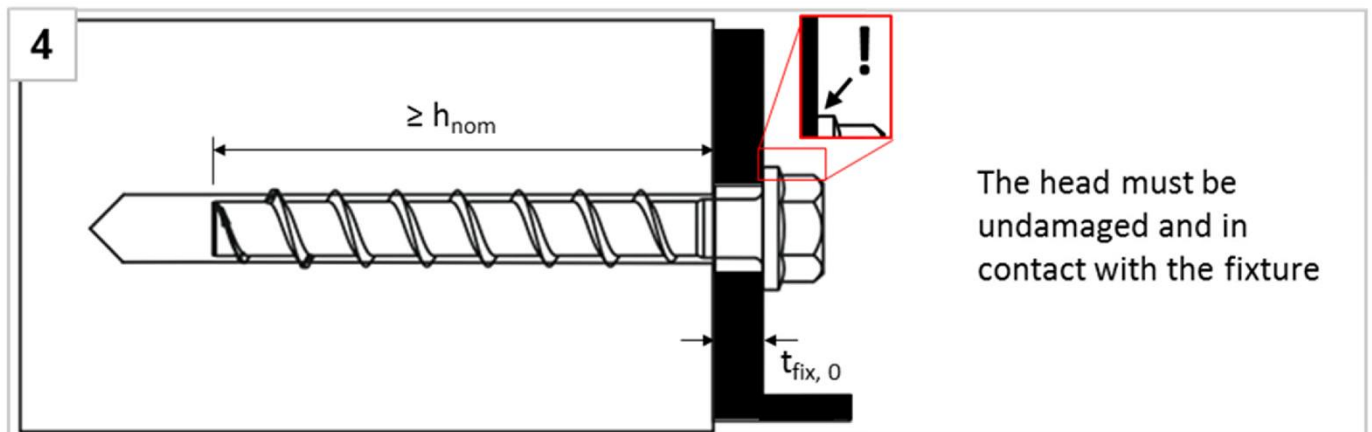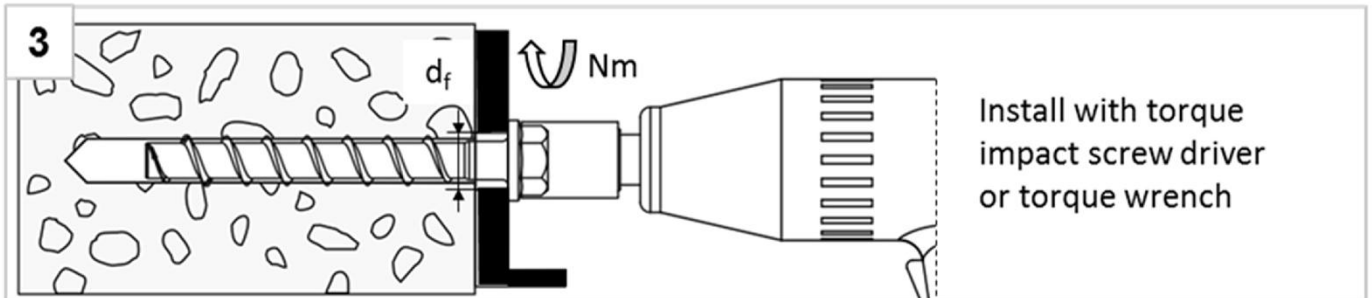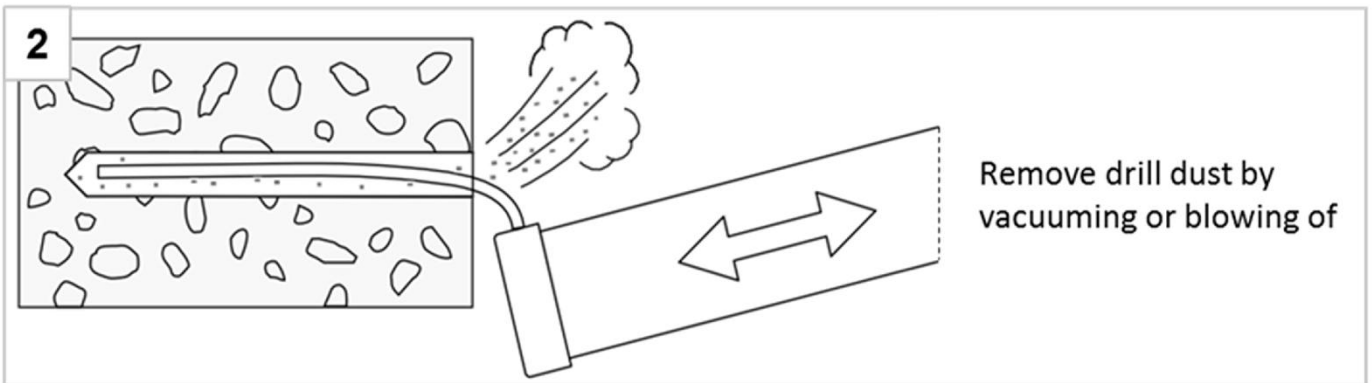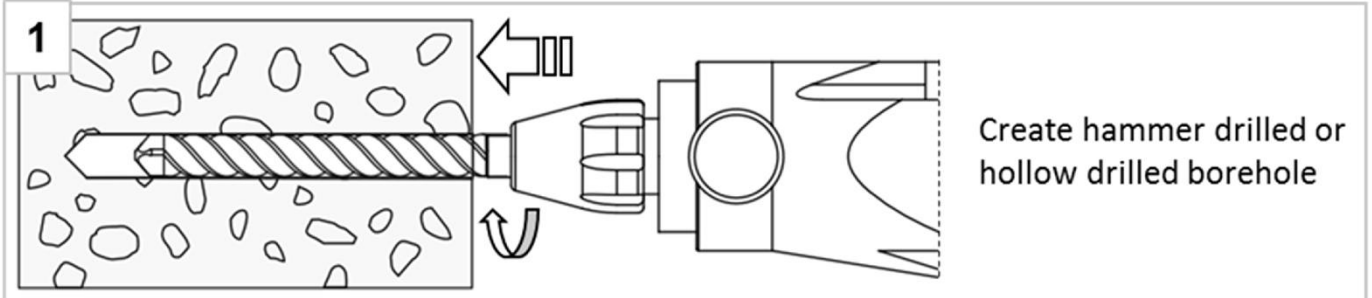


G&B concrete screw GETO PLUS TMK CE1

Intended use
Installation instructions

Annex B4

Installation Instructions for anchorages in prestressed hollow slabs

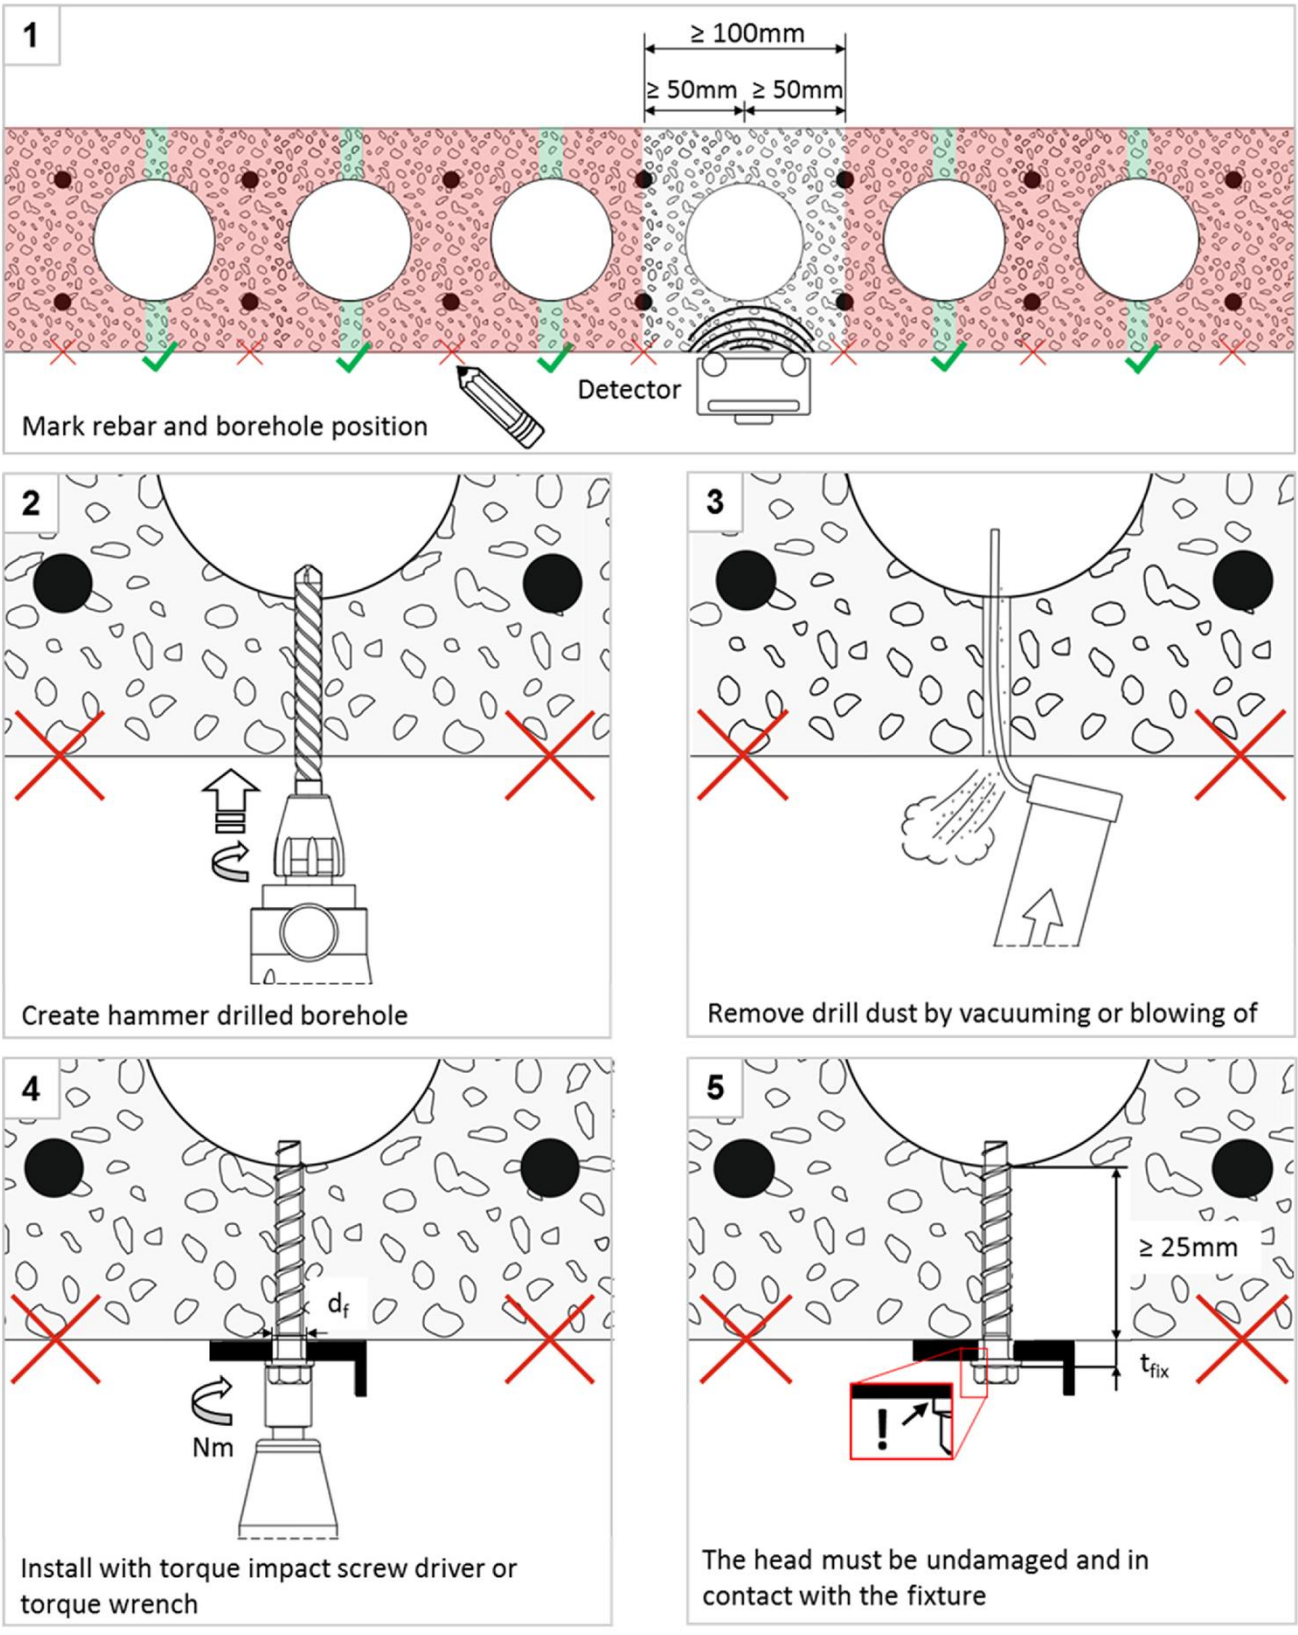

G&B concrete screw GETO PLUS TMK CE1

Intended use
Installation instructions for anchorages in prestressed hollow slabs

Annex B5

Table 5: Characteristic values for static and quasi-static loading

GETO PLUS TMK CE1 size			TMK 5	TMK 6		
Nominal embedment depth	h_{nom}		h_{nom1}	h_{nom1}	h_{nom2}	
	[mm]		35	35	55	
Steel failure for tension and shear loading						
Characteristic resistance	$N_{Rk,s}$	[kN]	8,7	14,0		
Partial safety factor	$\gamma_{Ms,N}$	[-]	1,5			
Characteristic resistance	$V_{Rk,s}$	[kN]	4,4	7,0		
Partial safety factor	$\gamma_{Ms,V}$	[-]	1,25			
Ductility factor	k_7	[-]	0,8			
Characteristic bending load	$M^0_{Rk,s}$	[Nm]	5,3	10,9		
Pull-out failure						
Characteristic resistance in C20/25	cracked	$N_{Rk,p}$	[kN]	1,5	3,0	7,5
	uncracked	$N_{Rk,p}$	[kN]	1,5	3,0	7,5
Increasing factor for $N_{Rk,p} = N_{Rk,p(C20/25)} * \psi_c$	C25/30	ψ_c	[-]	1,12		
	C30/37			1,22		
	C40/50			1,41		
	C50/60			1,58		
Concrete failure: Splitting failure, concrete cone failure and pry-out failure						
Effective embedment depth	h_{ef}	[mm]	27	27	44	
k-factor	cracked	$k_1 = k_{cr}$	[-]	7,7		
	uncracked	$k_1 = k_{ucr}$	[-]	11,0		
Concrete cone failure	spacing	$S_{cr,N}$	[mm]	$3 \times h_{ef}$		
	edge distance	$C_{cr,N}$	[mm]	$1,5 \times h_{ef}$		
Splitting failure	resistance	$N^0_{Rk,Sp}$	[kN]	$\min(N^0_{Rk,c}; N_{Rk,p})$		
	spacing	$S_{cr,Sp}$	[mm]	120	120	160
	edge distance	$C_{cr,Sp}$	[mm]	60	60	80
Factor for pry-out failure	k_8	[-]	1,0			
Installation factor	γ_{inst}	[-]	1,2	1,0	1,0	
Concrete edge failure						
Effective length in concrete	$l_f = h_{ef}$	[mm]	27	27	44	
Nominal outer diameter of screw	d_{nom}	[mm]	5	6		

G&B concrete screw GETO PLUS TMK CE1

Performances
Characteristic values for static and quasi-static loading

Annex C1

Table 6: Characteristic values of resistance in precast prestressed hollow core slabs C30/37 to C50/60

GETO PLUS TMK CE1 size			TMK 6		
Bottom flange thickness	d_b	[mm]	≥ 25	≥ 30	≥ 35
Characteristic resistance	F_{Rk}^0	[kN]	1	2	3
Edge distance	c_{cr}	[mm]	100		
Spacing	s_{cr}	[mm]	200		
Installation factor	γ_{inst}	[-]	1,0		

Table 7: Limiting distances for application in precast prestressed hollow core slabs

Distances for application in precast prestressed hollow core slabs			
Minimum edge distance	c_{min}	[mm]	≥ 100
Minimum anchor spacing	s_{min}	[mm]	≥ 100
Minimum distance between anchor groups	a_{min}	[mm]	≥ 100
Distance of core	l_c	[mm]	≥ 100
Distance of prestressing steel	l_p	[mm]	≥ 100
Distance between anchor position and prestressing steel	a_p	[mm]	≥ 50

G&B concrete screw GETO PLUS TMK CE1

Performances

Characteristic values and limiting distances in precast prestressed hollow core slabs

Annex C2

Table 8: Fire exposure – characteristic values of resistance ¹⁾

GETO PLUS TMK CE1 size				TMK 5	TMK 6			
Material				GETO PLUS TMK CE1	GETO PLUS TMK CE1		GETO PLUS TMK CE1 A4/HCR	
Nominal embedment depth		h _{nom}	h _{nom1}	h _{nom1}	h _{nom2}	h _{nom1}	h _{nom2}	
		[mm]	35	35	55	35	55	
Steel failure for tension and shear load ($F_{Rk,s,fi} = N_{Rk,s,fi} = V_{Rk,s,fi}$)								
Characteristic Resistance	R30	$F_{Rk,s,fi30}$	[kN]	0,8	0,9		1,2	
	R60	$F_{Rk,s,fi60}$	[kN]	0,6	0,8		1,2	
	R90	$F_{Rk,s,fi90}$	[kN]	0,4	0,6		1,2	
	R120	$F_{Rk,s,fi120}$	[kN]	0,3	0,4		0,8	
	R30	$M^0_{Rk,s,fi30}$	[Nm]	0,5	0,7		0,9	
	R60	$M^0_{Rk,s,fi60}$	[Nm]	0,4	0,6		0,9	
	R90	$M^0_{Rk,s,fi90}$	[Nm]	0,2	0,5		0,9	
	R120	$M^0_{Rk,s,fi120}$	[Nm]	0,2	0,3		0,6	
Pull-out failure								
Characteristic Resistance	R30-R90	$N_{Rk,p,fi}$	[kN]	0,375	0,75	1,875	0,75	1,875
	R120	$N_{Rk,p,fi}$	[kN]	0,3	0,6	1,5	0,6	1,5
Concrete cone failure								
Characteristic Resistance	R30-R90	$N^0_{Rk,c,fi}$	[kN]	0,65	0,65	2,21	0,65	2,21
	R120	$N^0_{Rk,c,fi}$	[kN]	0,52	0,52	1,76	0,52	1,76
Edge distance								
R30 - R120		$C_{cr,fi}$	[mm]	2 x h _{ef}				
In case of fire attack from more than one side, the minimum edge distance shall be ≥300mm.								
Spacing								
R30 - R120		$S_{cr,fi}$	[mm]	4 x h _{ef}				
The anchorage depth has to be increased for wet concrete by at least 30 mm compared to the given value.								

¹⁾ Not for application in prestressed hollow core slabs

G&B concrete screw GETO PLUS TMK CE1

Performances
Characteristic values under fire exposure

Annex C3