

Public-law institution jointly founded by the federal states and the Federation

European Technical Assessment Body
for construction products



European Technical Assessment

ETA-24/0686
of 18 October 2024

English translation prepared by DIBt - Original version in German language

General Part

Technical Assessment Body issuing the European Technical Assessment:

Deutsches Institut für Bautechnik

Trade name of the construction product

Wedge Anchor Chemofast BA3 / BA3 A4 / BA3 HCR

Product family to which the construction product belongs

Mechanical fasteners for use in concrete

Manufacturer

CHEMOFAST Anchoring GmbH
Hanns-Martin-Schleyer-Straße 23
47877 Willich
GERMANY

Manufacturing plant

Werk 2, Deutschland

This European Technical Assessment contains

24 pages including 3 annexes which form an integral part of this assessment.

This European Technical Assessment is issued in accordance with Regulation (EU) No 305/2011, on the basis of

EAD 330232-01-0601-v05, Edition 01/2024

The European Technical Assessment is issued by the Technical Assessment Body in its official language. Translations of this European Technical Assessment in other languages shall fully correspond to the original issued document and shall be identified as such.

Communication of this European Technical Assessment, including transmission by electronic means, shall be in full. However, partial reproduction may only be made with the written consent of the issuing Technical Assessment Body. Any partial reproduction shall be identified as such.

This European Technical Assessment may be withdrawn by the issuing Technical Assessment Body, in particular pursuant to information by the Commission in accordance with Article 25(3) of Regulation (EU) No 305/2011.

Specific Part

1 Technical description of the product

The Wedge anchor Chemofast BA3 / BA3 A4 / BA3 HCR is a fastener made of zinc plated steel, stainless steel or high corrosion resistant steel which is placed into a drilled hole and anchored by torque-controlled expansion.

The product description is given in Annex A.

2 Specification of the intended use in accordance with the applicable European Assessment Document

The performances given in Section 3 are only valid if the fastener is used in compliance with the specifications and conditions given in Annex B.

The verifications and assessment methods on which this European Technical Assessment is based lead to the assumption of a working life of the fastener of at least 50 years. The indications given on the working life cannot be interpreted as a guarantee given by the producer, but are to be regarded only as a means for choosing the right products in relation to the expected economically reasonable working life of the works.

3 Performance of the product and references to the methods used for its assessment

3.1 Mechanical resistance and stability (BWR 1)

Essential characteristic	Performance
Characteristic resistance to tension load (static and quasi-static loading)	see Annex B3, C1, C2
Characteristic resistance to shear load (static and quasi-static loading)	see Annex C3
Characteristic resistance for seismic performance categories C1 and C2	see Annex C4, C5
Displacements	see Annex C8, C9, C10

3.2 Safety in case of fire (BWR 2)

Essential characteristic	Performance
Reaction to fire	Class A1
Resistance to fire	see Annex C6, C7

3.3 Aspects of durability

Essential characteristic	Performance
Durability	See Annex B1

4 Assessment and verification of constancy of performance (AVCP) system applied, with reference to its legal base

In accordance with the European Assessment Document EAD 330232-01-0601-v05 the applicable European legal act is: 1996/582/EC.

The system to be applied is: 1

5 Technical details necessary for the implementation of the AVCP system, as provided for in the applicable European Assessment Document

Technical details necessary for the implementation of the AVCP system are laid down in the control plan deposited with Deutsches Institut für Bautechnik.


Issued in Berlin on 18 October 2024 by Deutsches Institut für Bautechnik

Beatrix Wittstock
Head of Section


beglaubigt:
Baderschneider

Wedge anchor BA3, BA3 A4 and BA3 HCR


Installation condition

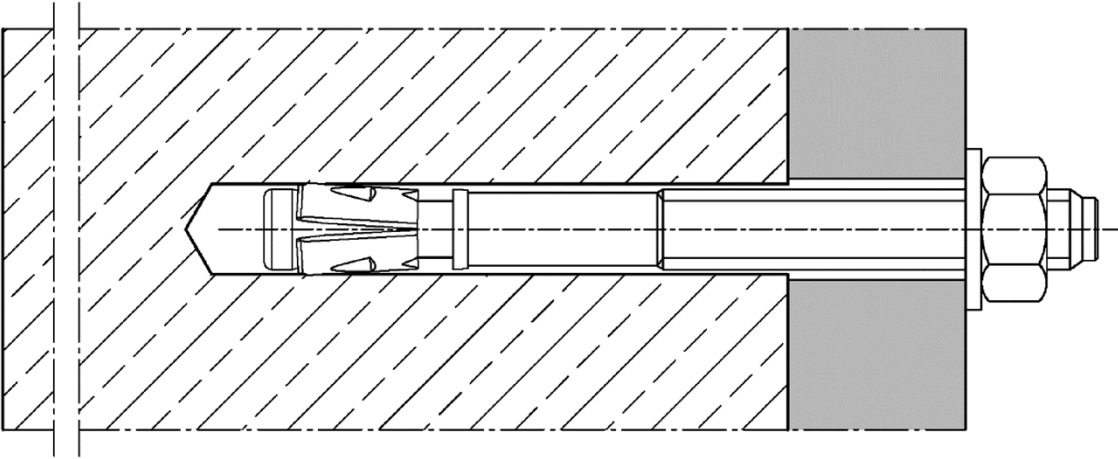

Installation condition with filling washer (optional with cap nut)

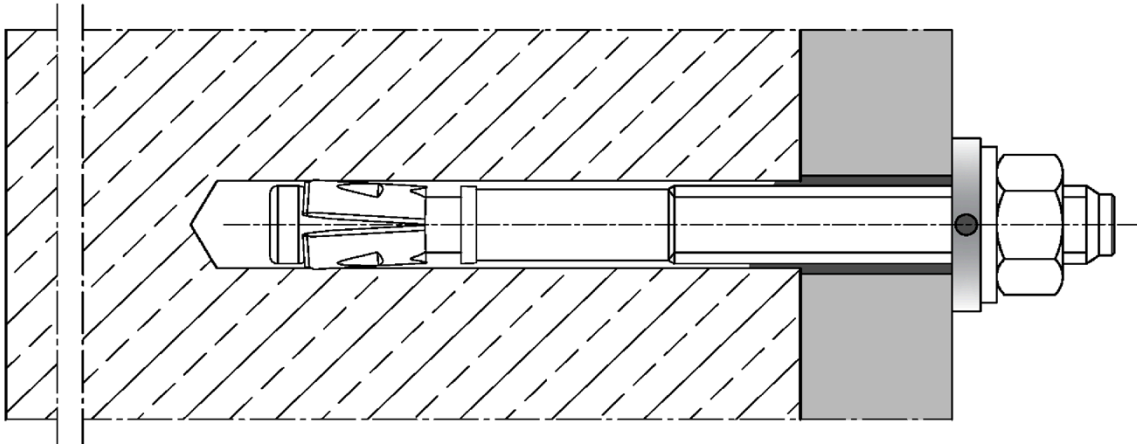

Installation condition with cap nut HM (optional with filling washer)

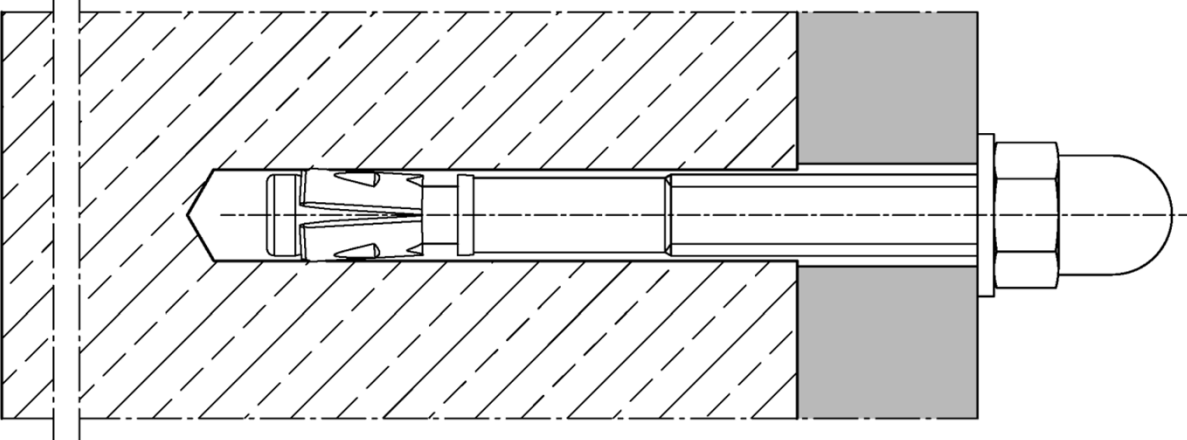


Wedge Anchor Chemofast BA3 / BA3 A4 / BA3 HCR

Product description

Product types and installation conditions

Annex A1

Marking

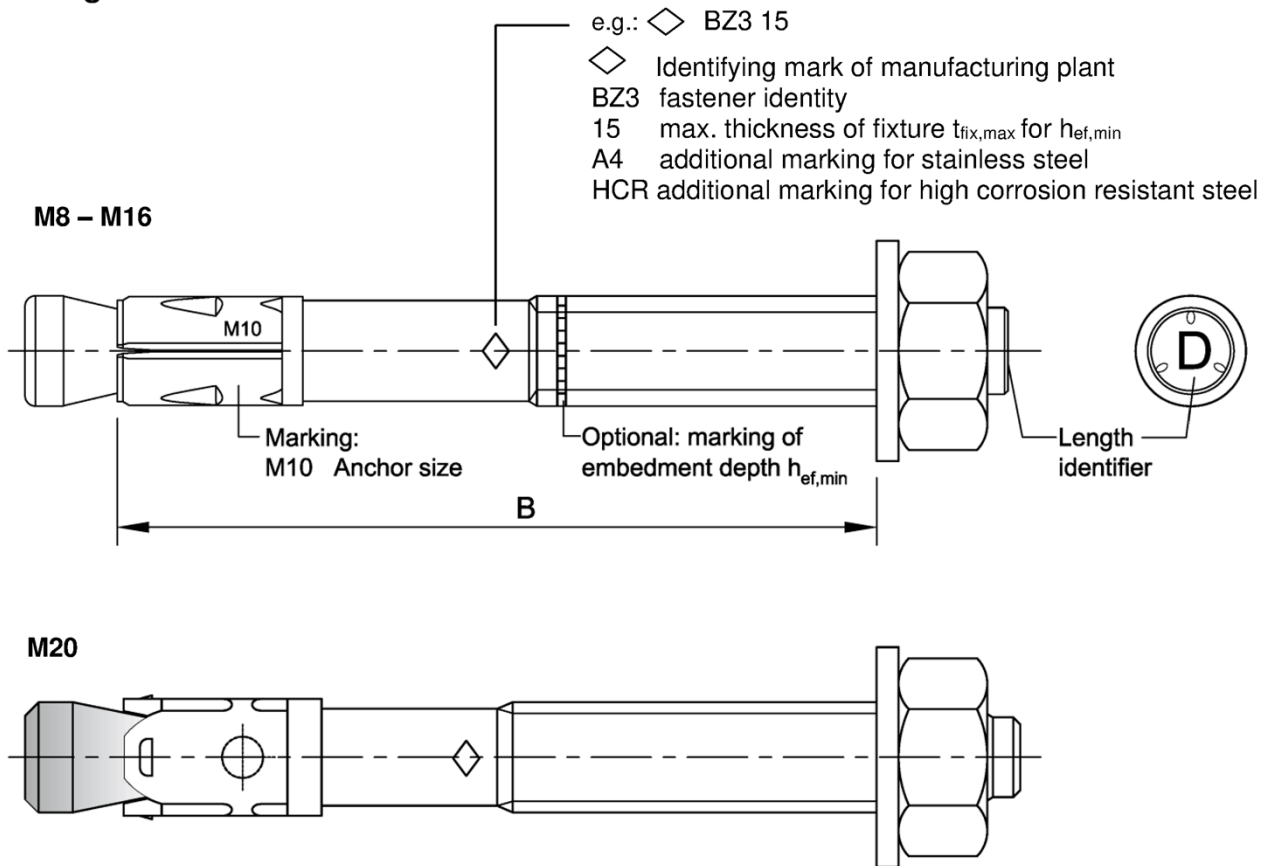

Usable length: $B = h_{ef} + t_{fix}$

h_{ef} : (existing) effective anchorage depth

t_{fix} : fixture thickness (including e.g. levelling layers or other non-load-bearing layers or additional filling washer)

Table A1: Length identification

Length identifier	A	B	C	D	E	F	G	H	I	J	K	L	M	N	O
Usable length B \geq	35	40	45	50	55	60	65	70	75	80	85	90	95	100	105
Length identifier	P	Q	R	S	T	U	V	W	X	Y	Z	AA	BB	CC	DD
Usable length B \geq	110	115	120	125	130	135	140	145	150	160	170	180	190	200	210
Length identifier	EE	FF	GG	HH	II	JJ	KK	LL							
Usable length B \geq	220	230	240	250	260	270	280	290	Dimensions in mm						

Wedge Anchor Chemofast BA3 / BA3 A4 / BA3 HCR

Annex A2


Product description
Marking

Table A2: Material

Part	BA3	BA3 A4	BA3 HCR
	Steel, zinc plated	Stainless steel CRC III	High corrosion resistant steel CRC V
Conical bolt	Steel, galvanized $\geq 5 \mu\text{m}$ fracture elongation $A_5 \geq 8\%$	Stainless steel fracture elongation $A_5 \geq 8\%$	High corrosion resistant steel fracture elongation $A_5 \geq 8\%$
Expansion sleeve	Stainless steel	Stainless steel	Stainless steel
Washer	Steel, galvanized $\geq 5 \mu\text{m}$	Stainless steel	High corrosion resistant steel
Filling washer VS			
Hexagon nut			
Cap nut HM			

Table A3: Fastener dimensions

Fastener size			BA3 / BA3 A4 / BA3 HCR				
			M8	M10	M12	M16	M20
Width across hexagon nut / cap nut HM	s	[mm]	13	17	19	24	30
Length of fastener	L	[mm]	$h_{ef} + t_{fix} + 18,0$	$h_{ef} + t_{fix} + 21,5$	$h_{ef} + t_{fix} + 26,0$	$h_{ef} + t_{fix} + 33,0$	$h_{ef} + t_{fix} + 37,0$
Thickness of filling washer VS	t	[mm]	5				

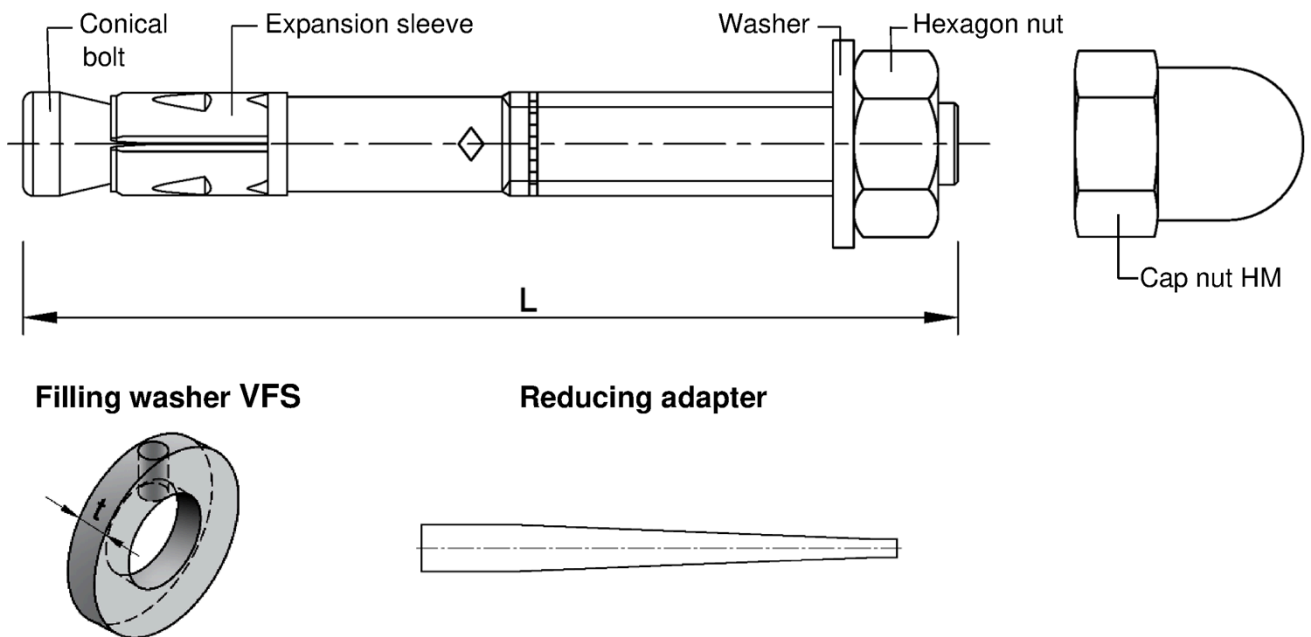

Wedge Anchor Chemofast BA3 / BA3 A4 / BA3 HCR

Product description
Material and dimensions

Annex A3


Specifications of intended use					
Wedge Anchor	BA3 / BA3 A4 / BA3 HCR				
	M8	M10	M12	M16	M20
Static or quasi-static action	✓				
Seismic performance categories C1 and C2	✓				
Fire exposure	R30 / R60 / R90 / R120				
Variable, effective anchorage depth	35 mm to 90 mm	40 mm to 100 mm	50 mm to 125 mm	65 mm to 160 mm	90 mm to 140 mm
<p>Base materials:</p> <ul style="list-style-type: none"> For all anchor sizes: compacted reinforced or unreinforced normal weight concrete according to EN 206:2013+A2:2021 For anchor sizes M8 to M10: steel fibre reinforced concrete (SFRC) according to EN 206:2013+A2:2021 including steel fibres according to EN 14889-1:2006, clause 5, group I. The maximum content of steel fibres is 80 kg/m³. Cracked or uncracked concrete Strength classes C20/25 to C50/60 according to EN 206:2013+A2:2021 <p>Use conditions (Environmental conditions):</p> <ul style="list-style-type: none"> Structures subject to dry internal conditions: all materials For all other conditions corresponding to corrosion resistance classes CRC according to EN 1993-1-4:2006 + A1:2015: stainless steel according to Annex A3, Table A2 of this ETA <p>Design:</p> <ul style="list-style-type: none"> Anchorage are designed under the responsibility of an engineer experienced in anchorages and concrete work. Verifiable calculation notes and drawings are prepared taking account of the loads to be anchored. The position of the fastener is indicated on the design drawings (e.g. position of the fastener relative to reinforcement or to supports, etc.). Design method EN 1992-4:2018 and Technical Report TR 055:2018 <p>Installation:</p> <ul style="list-style-type: none"> Hole drilling by hammer drill bit or vacuum drill bit Use of the fastener only as supplied by the manufacturer without exchanging the components of the fastener (exception: when using the cap nut HM) The anchor can be set in pre- or through-setting installation. Optionally, the annular gap between fixture and stud of BZ3 can be filled to reduce the hole clearance. For this purpose, the filling washer (Annex A3) must be used in addition to the supplied washer. For filling use Chemofast Injection Adhesive (e.g. UM-H, VK, EP 1000) or other high-strength injection mortar with compressive strength $\geq 40\text{N/mm}^2$. 					
Wedge Anchor Chemofast BA3 / BA3 A4 / BA3 HCR					Annex B1
Intended use Specifications					

Table B1: Installation parameters

Anchor size			BA3 / BA3 A4 / BA3 HCR					
			M8	M10	M12	M16	M20	
Nominal drill hole diameter	d_0	[mm]	8	10	12	16	20	
Cutting diameter of drill bit	$d_{cut} \leq$	[mm]	8,45	10,45	12,5	16,5	20,55	
Minimum effective anchorage depth	$h_{ef,min}$	[mm]	35	40	50	65	90	
Maximum effective anchorage depth	$h_{ef,max}$	[mm]	90	100	125	160	140	
Depth of drill hole	$h_{nom} = h_0 \geq$	[mm]	$h_{ef} + 8$	$h_{ef} + 9$	$h_{ef} + 10$	$h_{ef} + 14$	$h_{ef} + 14$ ($h_{ef} + 28$) ¹⁾	
	$h_1 \geq$	[mm]	$h_{ef} + 10$	$h_{ef} + 11$	$h_{ef} + 13$	$h_{ef} + 17$	$h_{ef} + 17$ ($h_{ef} + 31$) ¹⁾	
Diameter of clearance hole in the fixture ²⁾	$d_f \leq$	[mm]	9	12	14	18	22	
Projection after anchor has been inserted for installing with cap nut HM (acc. to Annex B7, Figure 3)	C	[mm]	10,5	12,5	16,0	19,5	23,0	
Installation torque	BA3	T_{inst}	[Nm]	15	40	60	110	160
	BA3 A4 / BA3 HCR	T_{inst}	[Nm]	15	40	55	100	200

¹⁾ Increased drill hole depth for hammer drilling without borehole cleaning.

²⁾ For larger diameters of clearance hole in the fixture, see EN 1992-4:2018, chapter 6.2.2.2

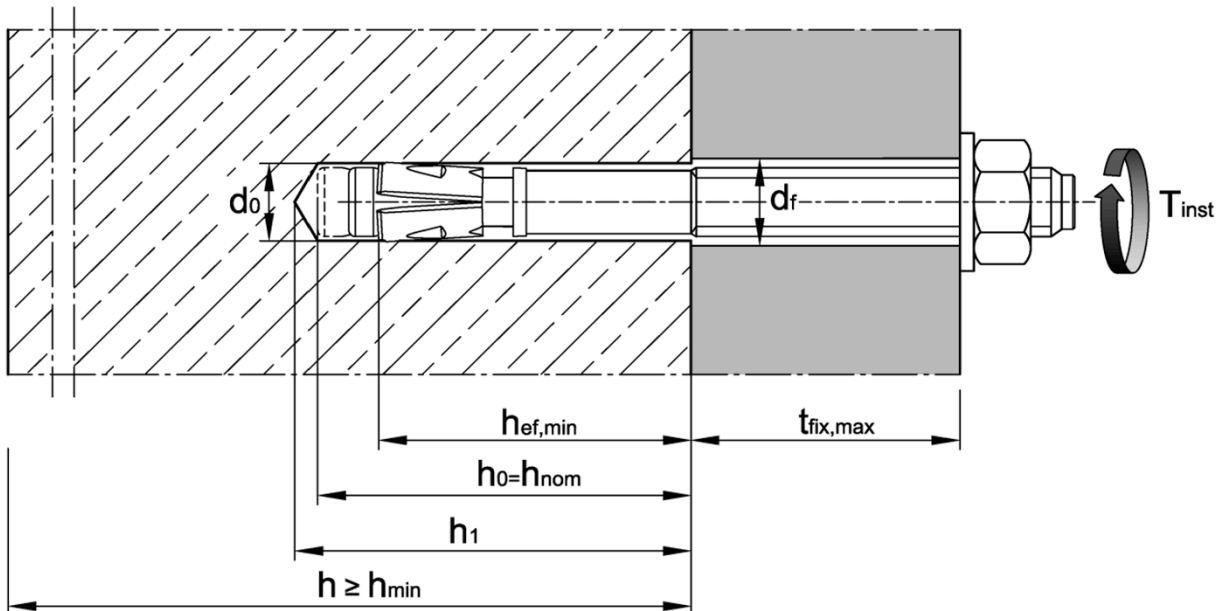

Wedge Anchor Chemofast BA3 / BA3 A4 / BA3 HCR

Intended use
Installation parameters

Annex B2

Table B2: Minimum thickness of concrete member, minimum spacings, edge distances

Anchor size			BA3 / BA3 A4 / BA3 HCR				
			M8	M10	M12	M16	M20
Minimum member thickness depending on h_{ef}	$h_{min} \geq$	[mm]	max (1,5 · h_{ef} ; 80)		max (1,5 · h_{ef} ; 100)	max (1,5 · h_{ef} ; 120)	max (1,5 · h_{ef} ; 150)
Minimum edge distances and spacings							
Minimum edge distance	c_{min}	[mm]	40	45	55	65	90
	for $s \geq$	[mm]	see Table B4				
Minimum spacings	s_{min}	[mm]	35	40	50	65	95
	for $c \geq$	[mm]	see Table B4				

The following equation must be fulfilled for the calculation of the minimum spacing and edge distance during installation in combination with variable anchorage depth and member thickness:

$$A_{sp,rqd} \leq A_{sp,ef}$$

Required splitting area $A_{sp,rqd}$ and idealized splitting area $A_{sp,ef}$ according to Table B4.

Table B3: Applicable concrete thickness h_{sp} and area A_{sp} to determine characteristic edge distance $c_{cr,sp}$

Anchor size				BA3 / BA3 A4 / BA3 HCR				
				M8	M10	M12	M16	M20
Applicable concrete thickness	BA3 BA3 A4 BA3 HCR	h_{sp}	[mm]	$\min(h; h_{ef} + 1,5 \cdot c \cdot \sqrt{2})$				
Area to determine $c_{cr,sp}$ ¹⁾	BA3	A_{sp}	[mm ²]	$\frac{N_{Rk,sp}^0 - 2,573}{0,000436}$	$\frac{N_{Rk,sp}^0 + 2,040}{0,000693}$	$\frac{N_{Rk,sp}^0 + 3,685}{0,000692}$	$\frac{N_{Rk,sp}^0 + 3,738}{0,000875}$	$\frac{N_{Rk,sp}^0 + 2,423}{0,000453}$
	BA3 A4 BA3 HCR	A_{sp}	[mm ²]	$\frac{N_{Rk,sp}^0 + 4,177}{0,000862}$	$\frac{N_{Rk,sp}^0 + 7,235}{0,000967}$	$\frac{N_{Rk,sp}^0 + 7,847}{0,000951}$	$\frac{N_{Rk,sp}^0 + 11,415}{0,000742}$	$\frac{N_{Rk,sp}^0 + 2,423}{0,000453}$

¹⁾ With $N_{Rk,sp}^0$ in kN

Wedge Anchor Chemofast BA3 / BA3 A4 / BA3 HCR

Intended use
Minimum spacings and edge distances
Required area and applicable concrete thickness

Annex B3


Table B4: Areas to determine spacings and edge distances for installation

Anchor size	BA3 / BA3 A4 / BA3 HCR							
	M8	M10	M12	M16	M20			
The following equation must be fulfilled for the calculation of the minimum spacing and edge distance during installation in combination with variable anchorage depth and member thickness:								
$A_{sp,reqd} \leq A_{sp,ef}$								
Idealized splitting area $A_{sp,ef}$								
The edge distances and spacings shall be selected or rounded in steps of 5 mm.								
Member thickness: $h > h_{ef} + 1,5 \cdot c$								
Single anchor or anchor group with $s \geq 3 \cdot c$								
Idealized splitting area	$A_{sp,ef}$	[mm ²]	$(6 \cdot c) \cdot (1,5 \cdot c + h_{ef})$					
Anchor group ($s < 3 \cdot c$)								
Idealized splitting area	$A_{sp,ef}$	[mm ²]	$(3 \cdot c + s) \cdot (1,5 \cdot c + h_{ef})$					
Member thickness: $h \leq h_{ef} + 1,5 \cdot c$								
Single anchor or anchor group with $s \geq 3 \cdot c$								
Idealized splitting area	$A_{sp,ef}$	[mm ²]	$(6 \cdot c) \cdot h$					
Anchor group ($s < 3 \cdot c$)								
Idealized splitting area	$A_{sp,ef}$	[mm ²]	$(3 \cdot c + s) \cdot h$					
Required splitting area $A_{sp,reqd}$								
BA3	cracked concrete	$A_{sp,reqd}$	[mm ²]	13 900	23 700	31 500	42 300	91 250
	uncracked concrete	$A_{sp,reqd}$	[mm ²]	22 500	34 700	41 300	50 200	110 000
BA3 A4 BA3 HCR	cracked concrete	$A_{sp,reqd}$	[mm ²]	16 900	25 900	29 800	44 300	91 250
	uncracked concrete	$A_{sp,reqd}$	[mm ²]	19 700	35 700	35 300	54 800	110 000
Wedge Anchor Chemofast BA3 / BA3 A4 / BA3 HCR							Annex B4	
Intended use Projected effective area to determine spacings and edge distances								

Installation instructions

Hole drilling with cleaning


1

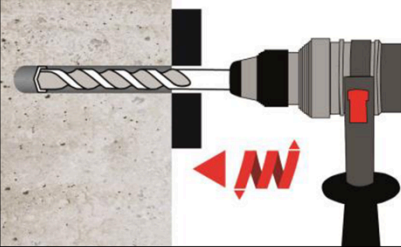

Hammer drilling or vacuum drilling:

Drill hole perpendicular to concrete surface.
If using a vacuum drill bit, proceed with step 3.


2

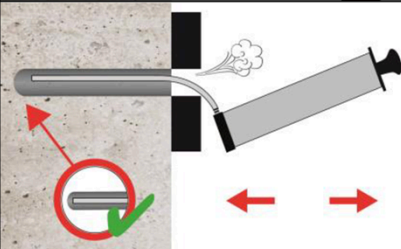

Blow out dust. Alternatively vacuum clean down to the bottom of the hole.

Hammer drilling without cleaning (M20)

1

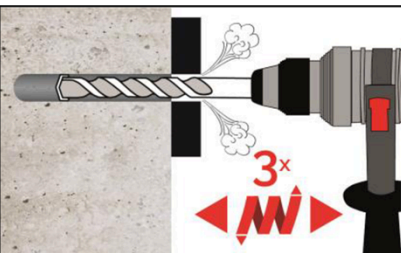

When the drill hole depth ($h_1 = h_{ef} + 31\text{mm}$) is reached, move the drill back and forth at least three times with the machine switched on to remove the dust in the drill hole (venting the drill hole). Continue with step 3.



Wedge Anchor Chemofast BA3 / BA3 A4 / BA3 HCR

Intended use
Installation instructions – hole drilling and cleaning




Annex B5

Installation instructions - continuation

Insert fastener

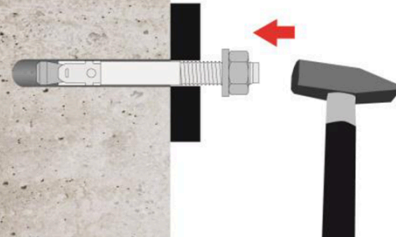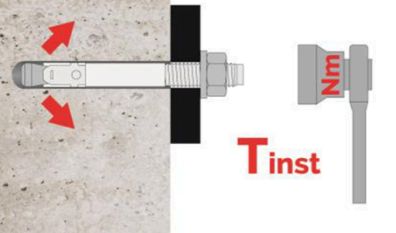3		Drive in fastener.
4		Apply installation torque T_{inst} .

Insert fastener with filling of annular gap


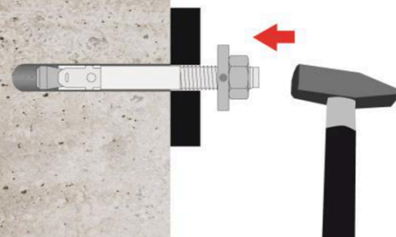
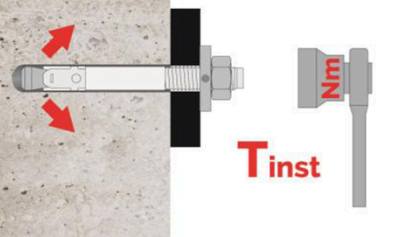
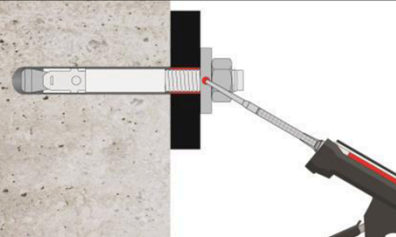

3		Drive in fastener with additionally mounted filling washer.
4		Apply installation torque T_{inst} .
5		Fill the annular gap between anchor and fixture with injection adhesive (see Annex B1). Use enclosed reducing adapter. The annular gap is completely filled, when excess mortar seeps out.

Wedge Anchor Chemofast BA3 / BA3 A4 / BA3 HCR

Intended Use

Installation instructions - set fastener

Annex B6

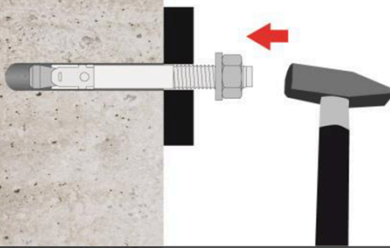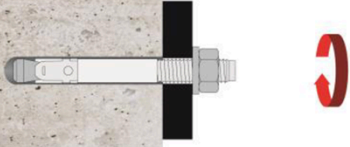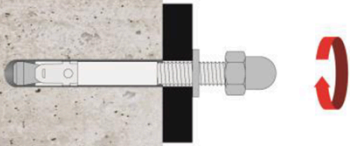Installation instruction – continuation		
Install fastener with cap nut HM		
3		Check position of nut. Projection C after anchor has been inserted see Annex B2, Table B1.
4		Drive in fastener.
5		Remove nut.
6		Screw on cap nut HM.
7		Apply installation torque T_{inst} .
<p>Wedge Anchor Chemofast BA3 / BA3 A4 / BA3 HCR</p>		
<p>Product description Installation instruction – set fastener with cap nut</p>		<p>Annex B7</p>

Fastener size			BA3				
			M8	M10	M12	M16	M20
Installation factor	γ_{inst}	[-]	1,0				
Steel failure							
Characteristic resistance	$N_{Rk,s}$	[kN]	19,8	30,4	44,9	79,3	126,2
Partial factor ⁴⁾	γ_{Ms}	[-]	1,5				
Pull-out							
Characteristic resistance in cracked concrete C20/25	$N_{Rk,p,cr}$	[kN]	9,5	15	22	30	45
Increasing factor $N_{Rk,p,cr} = \psi_C \cdot N_{Rk,p,cr} (C20/25)$	ψ_C	[-]	$\left(\frac{f_{ck}}{20}\right)^{0,439}$	$\left(\frac{f_{ck}}{20}\right)^{0,265}$	$\left(\frac{f_{ck}}{20}\right)^{0,5}$	$\left(\frac{f_{ck}}{20}\right)^{0,339}$	$\left(\frac{f_{ck}}{20}\right)^{0,338}$
Characteristic resistance in uncracked concrete C20/25	$N_{Rk,p,ucr}$	[kN]	14	24	30	50	55
Increasing factor $N_{Rk,p,ucr} = \psi_C \cdot N_{Rk,p,ucr} (C20/25)$	ψ_C	[-]	$\left(\frac{f_{ck}}{20}\right)^{0,489}$	$\left(\frac{f_{ck}}{20}\right)^{0,448}$	$\left(\frac{f_{ck}}{20}\right)^{0,5}$	$\left(\frac{f_{ck}}{20}\right)^{0,203}$	$\left(\frac{f_{ck}}{20}\right)^{0,5}$
Splitting							
Characteristic resistance	$N^0_{Rk,sp}$	[kN]	$\min (N_{Rk,p} ; N^0_{Rk,c})$				
Characteristic edge distance ²⁾	$C_{cr,sp}$	[mm]	$\min \left(\frac{A_{sp} + 0,8 \cdot (h_{sp} - h_{ef})^2}{(3,41 \cdot h_{sp} - 0,59 \cdot h_{ef})} ; \frac{A_{sp}}{h_{sp} \cdot \sqrt{8}} \right) \geq 1,5 \cdot h_{ef}$				
Characteristic spacing	$S_{cr,sp}$	[mm]	$2 \cdot C_{cr,sp}$				
Factor	$\psi_{h,sp}$	[-]	1,0				
Concrete cone failure							
Minimum, effective anchorage depth	$h_{ef,min}$	[mm]	35 ¹⁾	40	50	65	90
Maximum, effective anchorage depth	$h_{ef,max}$	[mm]	90	100	125	160	140
Characteristic edge distance	$C_{cr,N}$	[mm]	$1,5 \cdot h_{ef}$				
Characteristic spacing	$S_{cr,N}$	[mm]	$2 \cdot C_{cr,N}$				
Factor	cracked concrete	$k_{cr,N}$	7,7				
	uncracked concrete	$k_{ucr,N}$	11,0				
¹⁾ Fastenings with anchorage depth $h_{ef} < 40$ mm are restricted to the use of structural components which are statically indeterminate and subject to internal exposure conditions only. ²⁾ Applicable concrete thickness h_{sp} and area A_{sp} to determine characteristic edge distance $C_{cr,sp}$ according to Table B3 ³⁾ $N^0_{Rk,c}$ according to EN 1992-4:2018 ⁴⁾ In absence of other national regulations							
Wedge Anchor Chemofast BA3 / BA3 A4 / BA3 HCR						Annex C1	
Performance Characteristic values for tension loads, BA3 (Steel, zinc plated)							

Table C2: Characteristic values for tension loads under static or quasi-static action, BA3 A4 and BA3 HCR							
Fastener size			BA3 A4 / BA3 HCR				
			M8	M10	M12	M16	M20
Installation factor	γ_{inst}	[-]	1,0				
Steel failure							
Characteristic resistance	$N_{Rk,s}$	[kN]	19,8	30,4	44,9	74,6	126,2
Partial factor ⁴⁾	γ_{Ms}	[-]	1,5				
Pull-out							
Characteristic resistance in cracked concrete C20/25	$N_{Rk,p,cr}$	[kN]	9,5	17	22	35	45
Increasing factor $N_{Rk,p,cr} = \psi_C \cdot N_{Rk,p,cr} (C20/25)$	ψ_C	[-]	$\left(\frac{f_{ck}}{20}\right)^{0,488}$	$\left(\frac{f_{ck}}{20}\right)^{0,5}$	$\left(\frac{f_{ck}}{20}\right)^{0,435}$	$\left(\frac{f_{ck}}{20}\right)^{0,350}$	$\left(\frac{f_{ck}}{20}\right)^{0,338}$
Characteristic resistance in uncracked concrete C20/25	$N_{Rk,p,ucr}$	[kN]	20	25	42	50	55
Increasing factor $N_{Rk,p,ucr} = \psi_C \cdot N_{Rk,p,ucr} (C20/25)$	ψ_C	[-]	$\left(\frac{f_{ck}}{20}\right)^{0,240}$	$\left(\frac{f_{ck}}{20}\right)^{0,364}$	$\left(\frac{f_{ck}}{20}\right)^{0,213}$	$\left(\frac{f_{ck}}{20}\right)^{0,196}$	$\left(\frac{f_{ck}}{20}\right)^{0,5}$
Splitting							
Characteristic resistance	$N^0_{Rk,sp}$	[kN]	$\min (N_{Rk,p} ; N^0_{Rk,c})$				
Characteristic edge distance ²⁾	$C_{cr,sp}$	[mm]	$\min \left(\frac{A_{sp} + 0,8 \cdot (h_{sp} - h_{ef})^2}{(3,41 \cdot h_{sp} - 0,59 \cdot h_{ef})} ; \frac{A_{sp}}{h_{sp} \cdot \sqrt{8}} \right) \geq 1,5 \cdot h_{ef}$				
Characteristic spacing	$S_{cr,sp}$	[mm]	$2 \cdot C_{cr,sp}$				
Factor	$\psi_{h,sp}$	[-]	1,0				
Concrete cone failure							
Minimum, effective anchorage depth	$h_{ef,min}$	[mm]	35 ¹⁾	40	50	65	90
Maximum, effective anchorage depth	$h_{ef,max}$	[mm]	90	100	125	160	140
Characteristic edge distance	$C_{cr,N}$	[mm]	$1,5 \cdot h_{ef}$				
Characteristic spacing	$S_{cr,N}$	[mm]	$2 \cdot C_{cr,N}$				
Factor	cracked concrete	$k_{cr,N}$	7,7				
	uncracked concrete	$k_{ucr,N}$	11,0				
¹⁾ Fastenings with anchorage depth $h_{ef} < 40$ mm are restricted to the use of structural components which are statically indeterminate and subject to internal exposure conditions only ²⁾ Applicable concrete thickness h_{sp} and area A_{sp} according to Table B3 to determine characteristic edge distance $C_{cr,sp}$ ³⁾ $N^0_{Rk,c}$ according to EN 1992-4:2018 ⁴⁾ In absence of other national regulations							
Wedge Anchor Chemofast BA3 / BA3 A4 / BA3 HCR							Annex C2
Performance Characteristic values for tension loads, BA3 A4 and BA3 HCR							

Table C3: Characteristic values for **shear loads** under static and quasi-static action

Fastener size				BA3 / BA3 A4 / BA3 HCR				
				M8	M10	M12	M16	M20
Installation factor	γ_{inst}	[-]	1,0					
Steel failure <u>without</u> lever arm								
Characteristic resistance – unfilled annular gap	BA3	$V_{Rk,s}^0$	[kN]	15,7	26,8	38,3	60,0	83,8
	BA3 A4 / BA3 HCR	$V_{Rk,s}^0$	[kN]	16,8	27,8	39,8	69,5	108,5
Characteristic resistance – filled annular gap	BA3	$V_{Rk,s}^0$	[kN]	17,3	26,7	38,6	60,6	86,1
	BA3 A4 / BA3 HCR	$V_{Rk,s}^0$	[kN]	16,8	27,8	44,9	80,1	108,5
Partial factor ²⁾	γ_{Ms}	[-]	1,25					
Ductility factor	k_7	[-]	1,0					
Steel failure <u>with</u> lever arm								
Characteristic bending resistance	BA3	$M_{Rk,s}^0$	[Nm]	30	60	105	240	412
	BA3 A4 / BA3 HCR	$M_{Rk,s}^0$	[Nm]	27	55	99	223	390
Partial factor ²⁾	γ_{Ms}	[-]	1,25					
Concrete pry-out failure								
Pry-out factor	BA3	k_8	[-]	2,8	3,1	3,0	3,6	3,3
	BA3 A4 / BA3 HCR	k_8	[-]	2,7	2,8	3,3	3,4	3,3
Concrete edge failure								
Effective length of fastener in shear loading	l_f	[mm]	h_{ef} ¹⁾					
Outside diameter of fastener	d_{nom}	[mm]	8	10	12	16	20	
¹⁾ Fastenings with anchorage depth $h_{ef} < 40$ mm are restricted to the use of structural components which are statically indeterminate and subject to internal exposure conditions only. ²⁾ In absence of other national regulations.								
Wedge Anchor Chemofast BA3 / BA3 A4 / BA3 HCR							Annex C3	
Performance Characteristic values for shear loads								

Table C4: Characteristic values for seismic loading, performance category C1													
Fastener size				BA3 / BA3 A4 / BA3 HCR									
				M8		M10		M12		M16		M20	
Effective anchorage depth	$h_{ef} \geq$	[mm]	40	45	40	60	50	70	65	85	90	100	
Tension load													
Installation factor	γ_{inst}	[-]	1,0										
Steel failure													
Characteristic resistance	BA3	$N_{Rk,s,C1}$	[kN]	19,8	30,4	44,9	79,3	126,2					
	BA3 A4 / BA3 HCR	$N_{Rk,s,C1}$	[kN]	19,8	30,4	44,9	74,6	126,2					
Pull-out													
Characteristic resistance	BA3	$N_{Rk,p,C1}$	[kN]	9,1	15,0	22,0	30,0	45,1					
	BA3 A4 / BA3 HCR	$N_{Rk,p,C1}$	[kN]	9,0	17,0	22,0	35,0	45,1					
Shear load													
Steel failure without lever arm													
Characteristic resistance - unfilled annular gap	BA3	$V_{Rk,s,C1}$	[kN]	11,7	13,4	22,5	24,4	30,0	33,8	48,8	52,3	83,8	
	BA3 A4 / BA3 HCR	$V_{Rk,s,C1}$	[kN]	11,0	12,7	20,6	22,2	33,2	33,2	61,1	64,3	108,5	
Characteristic resistance - filled annular gap	BA3	$V_{Rk,s,C1}$	[kN]	14,0	14,7	24,1	24,4	37,0	38,6	60,2	60,2	86,1	
	BA3 A4 / BA3 HCR	$V_{Rk,s,C1}$	[kN]	12,6	16,8	24,5	27,5	36,7	39,8	67,7	74,2	108,5	
Factor for anchorages	unfilled annular gap	α_{gap}	[-]	0,5									
	filled annular gap	α_{gap}	[-]	1,0									
Wedge Anchor Chemofast BA3 / BA3 A4 / BA3 HCR											Annex C4		
Performance Characteristic resistance for seismic loading , performance category C1													

Table C5: Characteristic values for seismic loading, performance category C2

Fastener size				BA3 / BA3 A4 / BA3 HCR										
				M8		M10		M12		M16		M20		
Effective anchorage depth	$h_{ef} \geq$	[mm]		40	45	40	60	50	70	65	85	90	100	140
Tension load														
Installation factor	γ_{inst}	[-]		1,0										
Steel failure														
Characteristic resistance	BA3	$N_{Rk,s,C2}$	[kN]	19,8		30,4		44,9		79,3		126,2		
	BA3 A4 / BA3 HCR	$N_{Rk,s,C2}$	[kN]	19,8		30,4		44,9		74,6		126,2		
Pull-out														
Characteristic resistance	BA3	$N_{Rk,p,C2}$	[kN]	2,8	3,6	7,3	12,5	10,7	19,0	19,8	35,2	35,1	37,6	42,9
	BA3 A4 / BA3 HCR	$N_{Rk,p,C2}$	[kN]	2,3	3,2	5,0	7,7	8,0	13,8	19,0	29,4	35,1	37,6	42,9
Shear load														
Steel failure without lever arm														
Characteristic resistance - unfilled annular gap	BA3	$V_{Rk,s,C2}$	[kN]	7,3	11,3	15,4	19,0	18,3	28,0	39,4	43,3	69,0		
	BA3 A4 / BA3 HCR	$V_{Rk,s,C2}$	[kN]	7,5	8,6	12,5	15,9	22,4	25,6	42,7	46,1	88,9		
Characteristic resistance - filled annular gap	BA3	$V_{Rk,s,C2}$	[kN]	9,7	10,8	17,7	19,9	27,6	28,9	46,0	48,8	73,3		
	BA3 A4 / BA3 HCR	$V_{Rk,s,C2}$	[kN]	9,4	9,7	16,5	17,1	24,5	28,5	47,4	47,4	88,9		
Factor for anchorages	unfilled annular gap	α_{gap}	[-]	0,5										
	filled annular gap	α_{gap}	[-]	1,0										
Wedge Anchor Chemofast BA3 / BA3 A4 / BA3 HCR											Annex C5			
Performance Characteristic resistance for seismic loading , performance category C2														

Table C6: Characteristic values for tension and shear load under fire exposure, BA3 (steel, zinc plated)

Fastener size				BA3				
				M8	M10	M12	M16	M20
Tension load								
Steel failure								
Characteristic resistance	R30	$N_{Rk,s,fi}$	[kN]	1,2	2,6	4,6	7,7	9,4
	R60			1,0	1,9	3,3	5,6	8,2
	R90			0,7	1,3	2,1	3,5	6,9
	R120			0,6	1,0	1,5	2,5	6,3
Shear load								
Steel failure <u>without</u> lever arm								
Characteristic resistance	R30	$V_{Rk,s,fi}$	[kN]	4,0	7,5	12,3	20,7	11,0
	R60			2,7	5,1	8,5	14,2	10,6
	R90			1,4	2,7	4,6	7,7	10,2
	R120			0,8	1,6	2,7	4,5	10,0
Steel failure <u>with</u> lever arm								
Characteristic resistance	R30	$M^0_{Rk,s,fi}$	[Nm]	4,1	9,6	19,1	43,8	29,1
	R60			2,8	6,6	13,1	30,1	28,0
	R90			1,5	3,5	7,2	16,4	26,9
	R120			0,8	2,0	4,2	9,6	26,3
$N_{Rk,p,fi}$ and $N_{Rk,c,fi}$ according to EN 1992-4:2018								
Wedge Anchor Chemofast BA3 / BA3 A4 / BA3 HCR							Annex C6	
Performance Characteristic values under fire exposure, BA3 (steel, zinc plated)								

Table C7: Characteristic values for tension and shear load under fire exposure, BA3 A4 and BA3 HCR									
Fastener size				BA3 A4 / BA3 HCR					
				M8	M10	M12	M16	M20	
Tension load									
Steel failure									
Characteristic resistance	R30	$N_{Rk,s,fi}$	[kN]	4,0	6,9	11,0	18,1	36,9	
	R60			2,9	5,0	8,0	13,1	27,4	
	R90			1,8	3,1	4,9	8,1	17,9	
	R120			1,2	2,1	3,4	5,6	13,1	
Shear load									
Steel failure <u>without</u> lever arm									
Characteristic resistance	R30	$V_{Rk,s,fi}$	[kN]	8,5	17,6	32,0	52,6	73,5	
	R60			6,2	12,6	22,6	37,1	51,8	
	R90			3,9	7,5	13,1	21,5	30,1	
	R120			2,8	5,0	8,4	13,8	19,2	
Steel failure <u>with</u> lever arm									
Characteristic resistance	R30	$M^0_{Rk,s,fi}$	[Nm]	8,7	22,7	49,8	111,5	194,7	
	R60			6,3	16,2	35,1	78,6	137,2	
	R90			4,0	9,7	20,4	45,6	79,7	
	R120			2,8	6,5	13,0	29,2	50,9	
$N_{Rk,p,fi}$ and $N_{Rk,c,fi}$ according to EN 1992-4:2018									
Wedge Anchor Chemofast BA3 / BA3 A4 / BA3 HCR								Annex C7	
Performance Characteristic values under fire exposure, BA3 A4 and BA3 HCR									

Table C8: Displacements under tension load, BA3 (steel, zinc plated)

Fastener size		BA3											
		M8	M10	M12	M16	M20							
Displacements under static or quasi-static action													
$\delta_{N0} = \delta_{N0\text{-factor}} \cdot N$		N: acting tension load											
$\delta_{N\infty} = \delta_{N\infty\text{-factor}} \cdot N$													
Effective anchorage depth	$h_{ef} \geq$	[mm]	35	40	50	65	90						
Cracked concrete													
Factor for displacement	$\delta_{N0\text{-factor}}$	[mm/kN]	0,13	0,05	0,04	0,03	0,04						
	$\delta_{N\infty\text{-factor}}$	[mm/kN]	0,29	0,20	0,15	0,11	0,05						
Uncracked concrete													
Factor for displacement	$\delta_{N0\text{-factor}}$	[mm/kN]	0,03	0,01	0,004	0,005	0,02						
	$\delta_{N\infty\text{-factor}}$	[mm/kN]	0,03	0,03	0,03	0,03	0,03						
Displacement under seismic action C2													
Effective anchorage depth	$h_{ef} \geq$	[mm]	40	45	40	60	50	70	65	85	90	100	140
Displacements for DLS	$\delta_{N, C2(DLS)}$	[mm]	3,9	4,9	2,8	4,7	2,4	4,2	2,5	4,5	4,2	4,5	5,1
Displacements for ULS	$\delta_{N, C2(ULS)}$	[mm]	11,3	14,3	9,4	16,1	7,3	12,9	7,2	12,8	11,7	12,5	14,3

Table C9: Displacements under tension load, BA3 A4 and BA3 HCR

Fastener size		BA3 A4 / BA3 HCR											
		M8	M10	M12	M16	M20							
Displacements under static or quasi-static action													
$\delta_{N0} = \delta_{N0\text{-factor}} \cdot N$		N: acting tension load											
$\delta_{N\infty} = \delta_{N\infty\text{-factor}} \cdot N$													
Effective anchorage depth	$h_{ef} \geq$	[mm]	35	40	50	65	90						
Cracked concrete													
Factor for displacement	$\delta_{N0\text{-factor}}$	[mm/kN]	0,11	0,06	0,05	0,02	0,04						
	$\delta_{N\infty\text{-factor}}$	[mm/kN]	0,27	0,17	0,16	0,08	0,05						
Uncracked concrete													
Factor for displacement	$\delta_{N0\text{-factor}}$	[mm/kN]	0,02	0,00	0,001	0,00	0,02						
	$\delta_{N\infty\text{-factor}}$	[mm/kN]	0,05	0,05	0,05	0,05	0,03						
Displacement under seismic action C2													
Effective anchorage depth	$h_{ef} \geq$	[mm]	40	45	40	60	50	70	65	85	90	100	140
Displacements for DLS	$\delta_{N, C2(DLS)}$	[mm]	2,0	2,9	2,6	4,1	3,3	5,7	3,3	5,1	4,2	4,5	5,1
Displacements for ULS	$\delta_{N, C2(ULS)}$	[mm]	7,7	11,1	10,8	16,8	10,4	18,0	9,0	13,9	11,7	12,5	14,3

Wedge Anchor Chemofast BA3 / BA3 A4 / BA3 HCR

Annex C8

Performance
Displacements under tension load

Table C10: Displacements under shear load, BA3 (steel, zinc plated)

Fastener size		BA3									
		M8	M10	M12	M16	M20					
Displacements under static or quasi-static action											
$\delta_{V0} = \delta_{V0\text{-factor}} \cdot V$		V: acting shear load									
$\delta_{V\infty} = \delta_{V\infty\text{-factor}} \cdot V$											
Effective anchorage depth	$h_{ef} \geq$	[mm]	35	40	50	65	90				
Factor for displacement unfilled annular gap	$\delta_{V0\text{-factor}}$	[mm/kN]	0,15	0,09	0,09	0,07	0,06				
	$\delta_{V\infty\text{-factor}}$	[mm/kN]	0,22	0,13	0,14	0,11	0,10				
Factor for displacement filled annular gap	$\delta_{V0\text{-factor}}$	[mm/kN]	0,01	0,04	0,06	0,04	0,02				
	$\delta_{V\infty\text{-factor}}$	[mm/kN]	0,015	0,06	0,09	0,06	0,03				
Displacement under seismic action C2 ¹⁾ unfilled annular gap											
Effective anchorage depth	$h_{ef} \geq$	[mm]	40	45	40	60	50	70	65	85	90
Displacements for DLS	$\delta_{V,C2(DLS)}$	[mm]	2,8	2,7	3,0	3,1	3,4	3,7	3,4	3,8	5,1
Displacements for ULS	$\delta_{V,C2(ULS)}$	[mm]	5,1	5,0	5,0	5,5	6,3	9,9	6,0	9,6	9,4
Displacement under seismic action C2 filled annular gap											
Effective anchorage depth	$h_{ef} \geq$	[mm]	40	45	40	60	50	70	65	85	90
Displacements for DLS	$\delta_{V,C2(DLS)}$	[mm]	0,5	0,4	1,4	0,9	1,4	0,7	1,4	1,2	1,3
Displacements for ULS	$\delta_{V,C2(ULS)}$	[mm]	1,7	1,9	5,8	4,5	4,5	3,1	5,0	3,9	5,2
¹⁾ For anchorages with clearance in the fixture the annular gap must also be taken into account.											
Wedge Anchor Chemofast BA3 / BA3 A4 / BA3 HCR										Annex C9	
Performance Displacements under shear load											

Table C11: Displacements under shear load, BA3 A4 and BA3 HCR

Fastener size		BA3 A4 / BA3 HCR									
		M8	M10	M12	M16	M20					
Displacements under static or quasi-static action											
$\delta_{V0} = \delta_{V0\text{-factor}} \cdot V$		V: acting shear load									
$\delta_{V\infty} = \delta_{V\infty\text{-factor}} \cdot V$											
Effective anchorage depth	$h_{ef} \geq$	[mm]	35	40	50	65	90				
Factor for displacement unfilled annular gap	$\delta_{V0\text{-factor}}$	[mm/kN]	0,26	0,14	0,12	0,09	0,09				
	$\delta_{V\infty\text{-factor}}$	[mm/kN]	0,39	0,20	0,17	0,14	0,13				
Factor for displacement filled annular gap	$\delta_{V0\text{-factor}}$	[mm/kN]	0,16	0,05	0,05	0,03	0,09				
	$\delta_{V\infty\text{-factor}}$	[mm/kN]	0,23	0,08	0,08	0,05	0,13				
Displacement under seismic action C2 ¹⁾ unfilled annular gap											
Effective anchorage depth	$h_{ef} \geq$	[mm]	40	45	40	60	50	70	65	85	90
Displacements for DLS	$\delta_{V,C2(DLS)}$	[mm]	2,8	3,0	3,4	3,5	3,5	4,2	3,8	4,4	5,1
Displacements for ULS	$\delta_{V,C2(ULS)}$	[mm]	5,2	5,1	7,0	8,4	7,5	11,8	7,8	11,1	9,4
Displacement under seismic action C2 filled annular gap											
Effective anchorage depth	$h_{ef} \geq$	[mm]	40	45	40	60	50	70	65	85	90
Displacements for DLS	$\delta_{V,C2(DLS)}$	[mm]	0,9	0,6	1,2	0,5	1,5	1,5	1,6	1,6	4,1
Displacements for ULS	$\delta_{V,C2(ULS)}$	[mm]	2,5	2,6	5,4	3,6	6,0	7,1	6,2	6,2	8,4
¹⁾ For anchorages with clearance in the fixture the annular gap must also be taken into account											
Wedge Anchor Chemofast BA3 / BA3 A4 / BA3 HCR										Annex C10	
Performance Displacements under shear load											